



ELECTRIC GENERAL PURPOSE OVENS



E3117 GP Oven

KEY FEATURES

- Full depth worktop surface
 - *Extends kitchen working space*
- Vitreous enamelled oven chamber
 - *Easy to clean and to keep clean*
- Wide oven temperature range of 100 - 250°C
 - *Ideal to prepare a wide variety of food*
- 5 shelf positions allow 2 shelf cooking
 - *Versatile, ideal for a wide range of menu items*
- Oven has twin doors with individual catches
 - *Retains heat within the oven chamber*
- Two tier version available
 - *Extend output without increasing floor space*
- Low profile door handles
 - *Reduces intrusion into work space*
- Laser-etched control icons
 - *Permanent, indelible markings*

MODELS and ACCESSORIES

E3117 - General purpose oven

E3117 on Stand - General purpose oven on stand

E3117/2 - General purpose oven - two tier

- Fully integrated extended flue
- Splashplate and plateshelf
- Oven shelf
- Factory fitted, adjustable castors
- Fixed installation kit
- Heat resistant insulated floorpad
- Suiting kit

INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.






DOMINATOR PLUS

ELECTRIC GENERAL PURPOSE OVENS

MODEL DIMENSIONS (in mm)

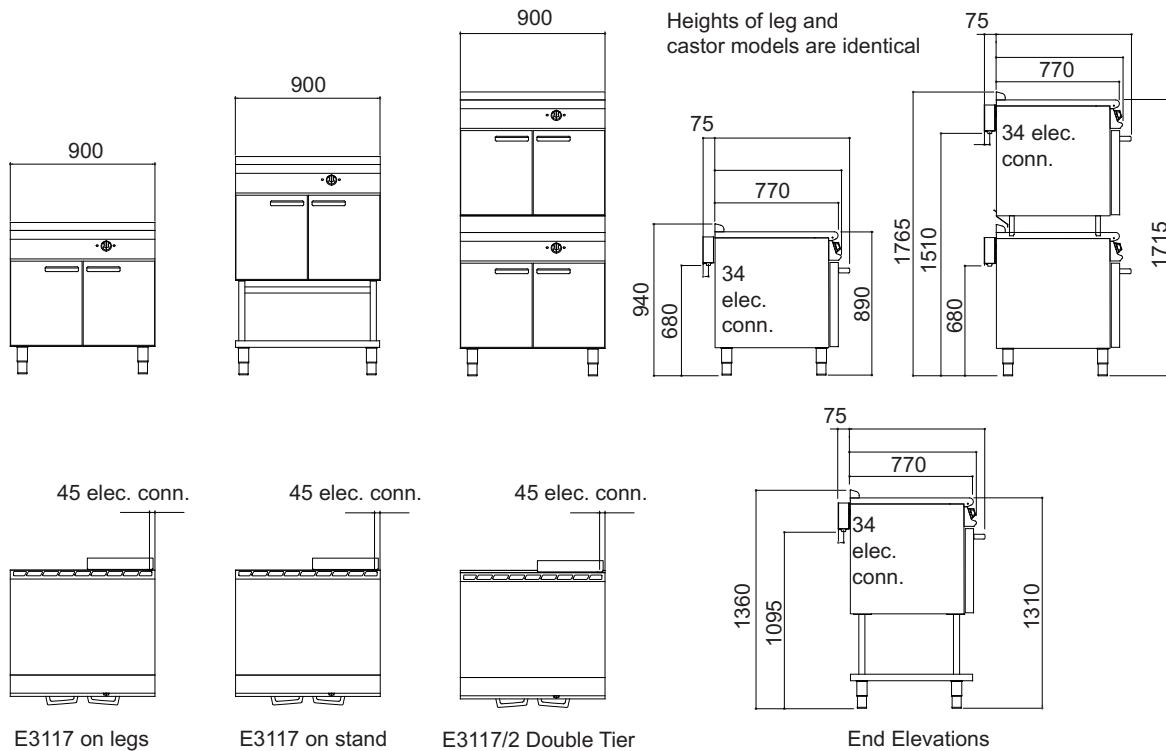

SPECIFICATION DETAILS

	E3117	E3117 on stand	E3117/2
Electrical rating (kW)	5	5	5 x 2
Electrical supply voltage	230V~	230V~	230V~
Required electrical supply 230V (amps)	30	30	30 x 2
Electrical current split (amps)	L1: 22	L1: 22	L1: 22 x 2
Oven element rating (kW)	5	5	5 x 2
Oven dimensions (w x d x h - mm)	700 x 535 x 430	700 x 535 x 430	400 x 535 x 430
Oven shelf (w x d - mm)	700 x 535	700 x 535	400 x 535
Gastronorm compatibility	2/1	2/1	2/1
Weight (kg)	102	140	204
Packed weight (kg)	120	158	240