

CHIEFTAIN BOILING TABLES

G1026X, G1060X and G1026BX



DESCRIPTION

Choice of four burner, six burner and single bullseye heavy duty models. Constructed of stainless steel with durable cast iron pan supports (open tops) or hob (solid tops). Units are supplied upon legs as standard. Castor option available (Please specify at time of order).

Open cabinet with shelf below cooking area is ideal for storing pots and containers.

Burners have fixed high/low settings for added flexibility and are fitted with flame failure devices to shut down gas supply in event of being accidentally extinguished.

Solid top model offers zonal heat for warming of individual pans as required.

FEATURES and BENEFITS

- Each open top burner is rated at a powerful 8.2kW
- *Heavy duty performance*
- Twin bullseye hob unit reaches a massive 520°C
- *zonal heat provides varied warming potential*
- Open cabinet below cooking area
- *ideal for additional storage of pots, etc.*
- All stainless steel finish (*interior and exterior*)
- *easy to clean*

OPTIONAL ACCESSORIES

- Pot rack (*900mm wide*)
- Pot rack (*1800mm wide*)
- Factory fitted castors

VENTILATION

Adequate ventilation, whether natural or mechanical, must be provided to supply sufficient fresh air for combustion and to allow easy removal of such products that may present risk to health. Recommendations for ventilation of appliances are given in BS5440:2 and HVCA specification DW/172. For multiple installations, requirements for individual appliances should be added together. Installation of any such system must be completed in accordance with local and/or national regulations that apply at time of commissioning

SITING

Unit must be installed on a firm level, non-combustible floor in a well lit position.

A minimum clearance of 150mm all around from any combustible wall is required. 150mm is also required from any non-combustible side wall to allow removal of panels. A minimum vertical clearance of 1220mm should be observed above top edge of flue.






CHIEFTAIN BOILING TABLES

G1026X, G1060X and G1026BX

MODEL DIMENSIONS (in mm)

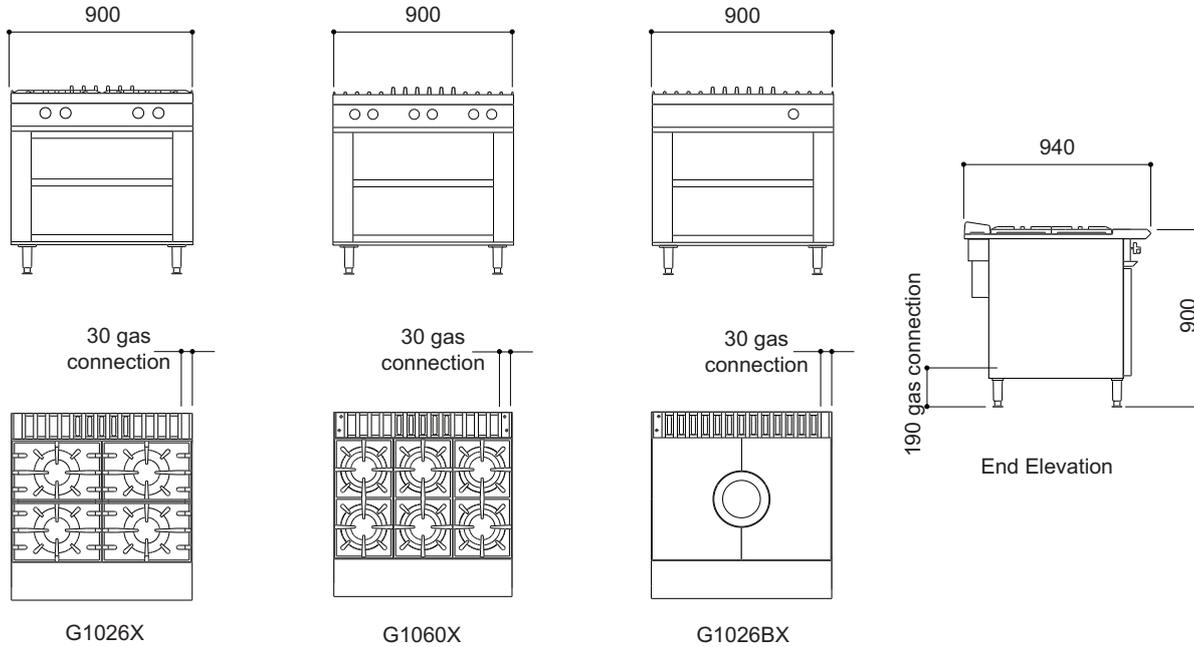

G1026X

G1060X

G1026BX

End Elevation

SPECIFICATION DETAILS

* ratings are gross values

	G1026X	G1060X	G1026BX
Hob rating * (kW - btu/hr)	8.2 / 28,000 x 4	8.2 / 28,000 x 6	10.5 / 36,000
Total rating * - Nat. (kW - btu/hr)	32.8 / 113,000	49.2 / 171,000	10.5 / 36,000
Total rating * - Prop. (kW - btu/hr)	32.8 / 113,000	60.2 / 171,000	10.5 / 36,000
Inlet pressure - Nat. (mbar)	20	20	20
Inlet pressure - Prop. (mbar)	37	37	37
Operating pressure - Nat. (mbar)	15	15	15
Operating pressure - Prop. (mbar)	37	37	37
Gas inlet (Natural gas)	3/4" BSP	3/4" BSP	3/4" BSP
Gas inlet (Propane gas)	1/2" BSP	1/2" BSP	1/2" BSP
Weight (kg)	141	240	159
Packed weight (kg)	147	246	165
Height on castors (mm)	925	925	925

